



Switch Removal Quick Reference



Mercury Convenience Lighting Switches


Mercury ABS G-Force Sensor Modules

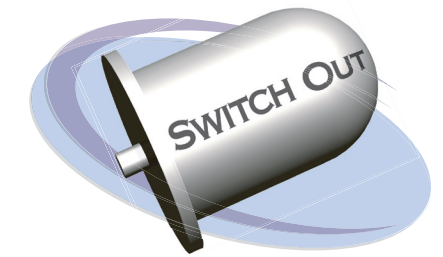


Typical Light Switches


Look for Switches Here


Vehicle Trunk

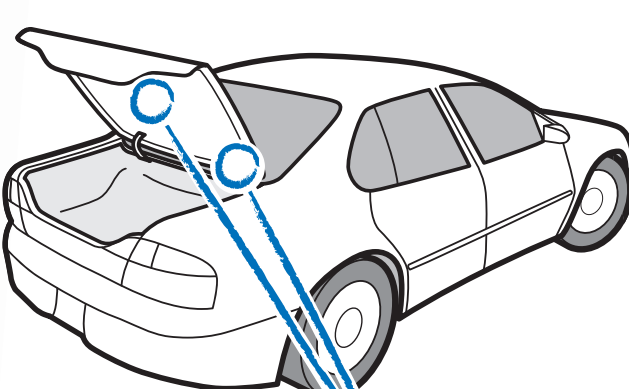

Hood

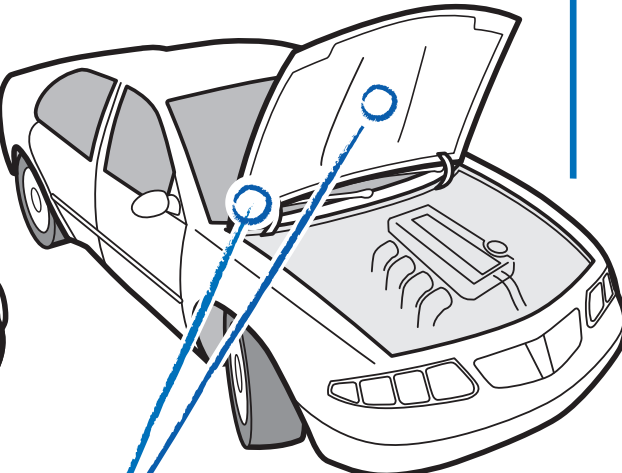


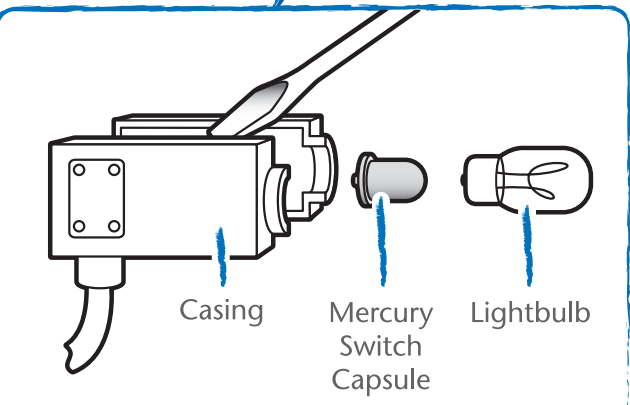




Typical ABS Module

Look for Modules Here

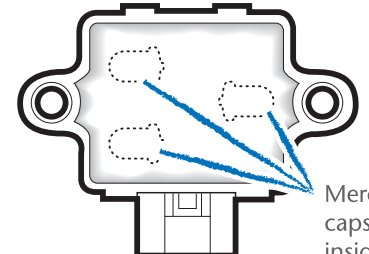

Mercury switch capsules are contained inside sensor casing

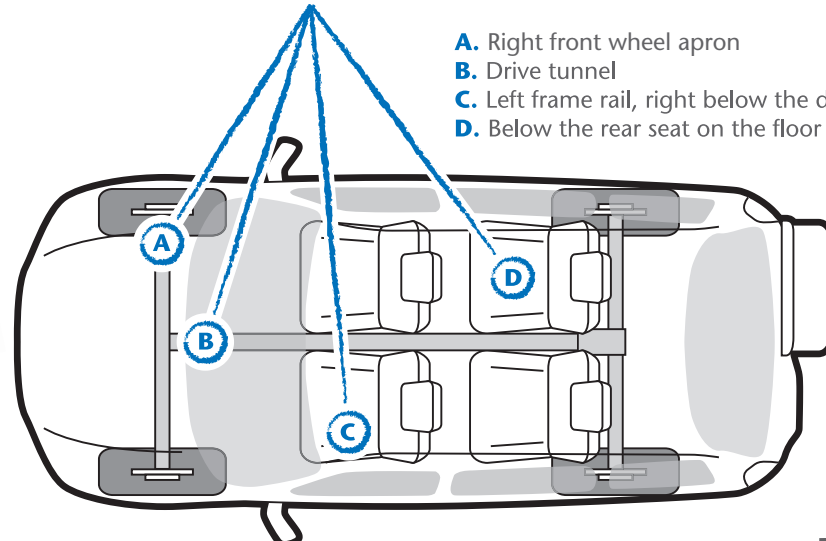

A. Right front wheel apron
B. Drive tunnel
C. Left frame rail, right below the driver
D. Below the rear seat on the floor pan

Simple Steps for Light Switch Removal

- 1 Disconnect the battery.
- 2 Locate the lighting assembly.
- 3 Cut the power supply to the fixture.
- 4 Remove any fasteners to separate the entire lighting assembly.
- 5 Break open the lighting assembly to expose the mercury switch capsule.
- 6 Remove the mercury switch capsule and place it in the *Switch Out* collection container.

Makes and Models Containing Convenience Lighting Switches

HOOD AND/OR TRUNK

Audi 100	1977-1988
Audi 200	1980-1988
Chrysler	1998 and older
Ford	2001 and older
General Motors	2002 and older
Mazda Navajo	1993-1997
Mazda B-Series Pickup	1995-1999
Porsche	1976-1991
Volvo	1991 and older

SUNVISOR VANITY MIRROR

Volvo	1991 and older
-------	----------------

Makes and Models Containing ABS Sensor Modules

Audi	1987-1993	Audi 100/Avant
	1989-1995	Audi V8
	1987-1991	Audi 200
	1987-1992	Audi Coupe Quattro
	1987-1992	Audi 80/90
Chrysler	1992-1996	Dodge Stealth 4WD
	1992	Eagle 200 GTX AWD
	1992-2001	Jeep Cherokee
	1993-2001	Jeep Grand Cherokee
	1992-1995	Jeep YJ
	1997-2003	Jeep TJ
Ford	1993-1997	Ford Bronco
	1993-2002	Ford Explorer
	1995-2001	Ford Ranger 4x4
	1997-2002	Mercury Mountaineer AWD
Mazda	1993-2002	Mazda Navajo
	1995-2001	4x4 B-Series Pick-up
Nissan	1996	Pathfinder 4x4
Subaru	1990-1995	Legacy AWD with 5MT
	1993-1996	Impreza AWD with 5MT

Simple Steps for ABS Sensor Removal

- 1 Disconnect the battery.
- 2 Locate the ABS G-Force sensor in one of the four possible locations.
- 3 Remove the entire ABS G-Force sensor and place it in the *Switch Out* collection container.

NOTE: The ABS G-Force sensor modules should be placed in the *Switch Out* containers. Do not attempt to remove the mercury switch capsules from the sensor module.

NOTE: A comprehensive list of specific vehicles containing mercury switches, as well as other resources, can be found at www.switchout.ca